



2025 Q3 Labortops

VALID UNTIL 30.09.2025

Temperature Measurement	2	Bottles	14
Spectroscopy	3	Volumetrics	15
Climate Measurement	4	Liquid Handling	16 - 17
Cryo and Tempering	5	Sampling / Sample Preparation	18 - 19
Chromatography	6	Ultra Sonic	20
Filtration	7	General Laboratory Supply	21 - 22
NMR	8	Timer	23
Laboratory Equipment	9	Stirring / Shaking / Mixing	24 - 26
Cleanroom	10	Rotary Evaporator	27
Personal Protection	11	Centrifugation / Vortexer	28 - 29
Microbiology	12	Weighing	30
Genomics	13	pH- and Conductivity Measurement	31 - 32

PARTNER OF
LLG
Laboratory Supply Solutions

Data Logger EBI 20-T1, Temperature/Humidity data logger EBI 20-TH1



- Transport and storage monitoring
- Visual alarm
- Stores up to 40000 measured values, readable at any time



EBI 20-T1



EBI 20-TH1

Applications:

- Transport
- Storage monitoring
- Refrigeration areas and cold rooms

Features:

- Waterproof
- Visual alarm
- Max/min values on display
- Stores 40000 readings, can be read off at any time

Scope of supply:

EBI 20-T1: Temperature Logger

EBI 20-T1-Set: Temperature Logger, evaluation software, Interface

EBI 20-TH1: Humidity data logger

EBI 20-TH1-Set: Humidity data logger, evaluation software, Interface

Specifications

Measuring range temperature:	-30 to +70 °C
Measuring range humidity (EBI 20-TH1):	0% to 100% R.H.
Accuracy temperature:	±0.5 °C (-20 to +40 °C); ±0.8 °C for remaining measuring range
Accuracy humidity (EBI 20-TH1):	±3% R.H. (10 to 90% R.H.)
Resolution temperature:	0.1 °C
Resolution humidity (EBI 20-TH1):	0.1% R.H.
Memory:	40000 samples
Sensor:	NTC for temperature/capacitive for humidity
Operating temperature:	-30 to +70 °C
Storage temperature:	-40 to +70 °C
Measuring period:	1 minute to 24 hours
Power supply:	3 V lithium (CR 2450), can be replaced by user
IP code:	IP 67 (EBI-20 T1)/IP 52 (EBI 20-TH1)
Housing:	ABS
Dimensions (L x W x H):	69 x 48 x 22 mm

Type	PK	Cat. No.	Price
			EUR
EBI 20-T1	1	9.908 069	56.88
EBI 20-T1-Set	1	9.908 073	150.10
EBI 20-TH1	1	9.908 070	88.48
EBI 20-TH1-Set	1	9.908 074	181.70



Penetration/infrared thermometer testo 104-IR BT

Penetration thermometer with integrated infrared sensor for quick and easy determination of surface and core temperature in the food sector. Suitable for checks as part of HACCP processes. The infrared measuring device is equipped with a 2-point laser with 10:1 optics. Seamless, digital documentation is possible via the testo Smart App connection. All measurement values are automatically transferred to the testo Smart App via Bluetooth®. For regulatory requirements and internal quality assurance, data can be exported or professional reports can be created in PDF format (incl. signature & comment function). The penetration/infrared thermometer is watertight (IP65), EN 13485 certified, and HACCP-compliant.

Scope of supply: Penetration/infrared thermometer, batteries, instruction manual, calibration protocol



Temp. range °C	Dimensions (W x D x H) mm	PK	Cat. No.	Price
-30 ... 250	48 x 21 x 281	1	4.701 461	EUR 164.00

Disposable data logger TempMate-S1



- Automatic report generation in PDF and CSV format
- 110 days runtime, 16000 measured values every 10 minutes
- Food-safe according to HACCP

The single-use data logger TempMate-S1 with its built-in USB connector, is the ideal solution for low-cost temperature monitoring of transports.

- Auto-generating PDF and CSV format data report
- 110 days run time 16000 measurements, 10-minute interval
- Up to 5 alarm points configurable
- Integrated USB connector
- LED Alarm indicators
- Food proof according to HACCP

Specifications

Temperature range:	-30 ... 70 °C
Accuracy:	±0.5 °C at -20 ... +40 °C/±1.0 °C in remaining range
Resolution:	0.1 °C
Data memory:	16000 measurements
Recording cycle:	110 days
Sampling interval:	10 min
Shelf life:	24 months
Dimensions (L x W x H):	80 x 47 x 7 mm
Weight:	14.6 g
IP code:	IP 67/NEMA 6
Certifications:	Calibration Certificate, EN 12830 S, T, C, D, 1

Type	PK	Cat. No.	Price
			EUR
TempMate-S1	1	6.285 049	21.50

Digital refractometer RFM340-T



- High-resolution 7" HD touchscreen display
- Brix value precision up to three decimal places

New

High-precision measuring device with Peltier temperature control for demanding applications in the food, beverage, and chemical industries. SMART temperature stability, RFID user identification, and application-specific, pre-programmed methods simplify routine analyses. Measurements can be performed quickly and reliably in Brix, refractive index (RI), or up to 100 user-defined scales.



- High-resolution 7" HD touchscreen display
- Flat prism surface facilitates cleaning
- Wide beam scan for non-homogeneous samples
- Brix precision to three decimal places
- Data memory for over 8000 readings
- Menu with PIN protection
- Dual display function: the display of Brix or RI values alongside the equivalent sucrose SG result
- USB (A), USB (B), and Ethernet interface
- Output as secure PDF as possible
- USB "Backup & clone"
- Remote access for diagnostics and maintenance
- Supports FDA Regulation 21 CFR Part 11

Measuring range	Temp. range °C	PK	Cat. No.	Price
0 ... 100 °Brix; 1.32 ... 1.58 RI	0 ... 70	1	4.694 491	11,865.00
				EUR

Sucrose in water (Brix) standards

Certified reference material according to ISO 17034 and ISO 17025 for the calibration or validation of appropriate test methods for the determination of the Brix value. The product has a shelf life of 20 weeks and is manufactured under ICUMSA guidelines.



- Ready to use
- Can be used with any refractometer
- Provided in a dropper bottle, 1 ml

Measuring range	PK	Cat. No.	Price
5% Brix	1	9.801 502	85.76
7% Brix	1	9.801 503	85.76
10% Brix	1	9.801 504	85.76
11,2% Brix	1	9.801 505	85.76
11,5% Brix	1	9.801 506	85.76
12% Brix	1	9.801 507	85.76
12,5% Brix	1	9.801 508	85.76
15% Brix	1	9.801 509	85.76
20% Brix	1	9.801 510	85.76
25% Brix	1	9.801 511	85.76
30% Brix	1	9.801 512	85.76
35% Brix	1	9.801 513	85.76
40% Brix	1	9.801 514	85.76
45% Brix	1	9.801 515	85.76
50% Brix	1	9.801 516	85.76
55% Brix	1	9.801 517	85.76
60% Brix	1	9.801 518	85.76

Photometer MD50



- Highest accuracy for samples with low contamination
- Measurement of COD in high, medium and very low ranges for versatile applications
- Stable and compact



New



The MD50 is specifically designed for COD determination and offers superior performance enhanced usability and expanded testing capabilities, including the new Very Low Range (VLR) COD method for ultra-sensitive measurements.

- Highest accuracy for low-pollution samples
- Measurement of COD in high, medium and very low ranges for versatile applications
- Easy operation thanks to intuitive symbols and animations as well as user-friendly navigation
- Results within seconds enable high-efficiency
- Time-saving with the One Time Zero function (stays valid for up to 8 hours)
- Handheld design for comfortable single-handed operation
- Robust housing with side protection for extra durability
- Wireless NFC and USB-C data transfer
- Automatic GLP compliance
- Versatile connectivity via the AquaLX® app or Lovibond® Data Expert software
- Pre-programmed Lovibond® CSB cuvette tests for operation right out of the box available separately

Methods: M134, M130, M133, M131, M132

Scope of supply: Photometer in carrying case, adapter for cells (16 mm), 2 x dosing syringes (1 ml, 2 ml), USB-C cable, screwdriver, manual, 2 x AA batteries

Type	Dimensions (W x D x H) mm	PK	Cat. No.	Price
MD50 COD	76 x 155 x 45	1	6.523 619	495.00
				EUR

Room climate monitor RM 100



Ideal for monitoring the CO₂ concentration in any room

-ebro-
Measurements for Life



For reliable control and evaluation of indoor air quality. Simultaneous measurement and display of temperature, CO₂ concentration and humidity. The CO₂ concentration in the air is additionally indicated by three LEDs as good, medium or bad.

- Alarming when a limit is exceeded
- Large, illuminated display
- Factory calibration certificate

Scope of supply: Room climate monitor RM 100, external AC/DC adapter

Specifications

CO₂ range:	0 ... 3000 ppm
Resolution:	1 ppm (0 ... 1000 ppm), 5 ppm (1001 ... 2000 ppm), 10 ppm (2001 ... 3000 ppm)
Accuracy:	below 25 °C: ±80 ppm or ±5% of measured value (<2000 ppm); ±7% (>2000 ppm)
LED's:	green: <800 ppm, yellow: 800 ... 1200 ppm, red: >1200 ppm
Temperature range:	0 ... 50 °C
Resolution:	0.1 °C
Accuracy:	±1 °C
Relative humidity:	20 ... 90%
Resolution:	1%
Accuracy:	±5%
Dimensions (L x D x H):	137 x 51 x 99 mm
Weight:	200 g
Electricity supply:	USB or 5 VDC adapter
Power supply:	100-240 VAC 50/60 Hz

Type	PK	Cat. No.	Price
			EUR
RM 100	1	6.288 263	174.00

Digital Thermo-hygrometer

For monitoring indoor temperature and humidity.

- Large, easy-to-read display
- Display of maximum and minimum values
- °C/°F-switchable
- For hanging or standing

Scope of supply: Thermo-hygrometer, battery, operating instructions

TFA



Temperature range:	-10 ... 60 °C
Temperature accuracy:	±1 °C (-10 ... 50 °C)
Humidity range:	10 ... 99% rH
Humidity accuracy:	±5% (25 ... 75% rH)
Dimensions (L x W x H):	102 x 21(50) x 110 mm
Weight:	122 g

Type	PK	Cat. No.	Price
			EUR
Digital Thermo-hygrometer	1	6.225 927	22.60

Light measuring instrument testo 540



Quick and easy-to-use instrument for measuring lighting conditions in the workplace. The sensor is adapted to the spectral sensitivity of the eye.

- Display illumination
- Hold-function
- Max./min. values

Scope of supply: Metre incl. protection cap, batteries, calibration protocol



Specifications

Measuring range:	0 to 99999 lx
Resolution:	1 lx (0 to 19999 lx) 10 lx (remaining range)
Accuracy:	±3 lx or ±3%
Measuring frequency:	0.5 s
Dimensions (W x D x H):	133 x 46 x 25 mm
Weight:	95 g
IP code:	IP 40
Power supply:	2 Micro cells AAA

Type	PK	Cat. No.	Price
			EUR
testo 540	1	6.232 393	150.00

Secchi Disk



For determining the depth of visibility and light permeability of water. Sturdy design made of strong, hard-wearing plastic. Lead weight for better lowering. The approx. 15 cm high rod is fitted with an eyelet for fastening the lowering engine. The lowering line is marked in intervals of 100 cm with figures from 1 to 10 and in between additionally with line markings each 50 cm for better reading of the depth of visibility while the disk is being lowered.

Lowering line, please order separately.

Description	PK	Cat. No.	Price
			EUR
Secchi Disk, diam. 250 mm, 4 areas (2 x black, 2 x white)	1	6.267 808	76.09
Lowering line, 10 m, marked in intervals of 50 cm and 100 cm	1	7.072 324	30.22

Grippers for vaccine vials, PP




For precise gripping and safe removal of crimped vaccine/serum vials from cold storage boxes. Set consisting of 5 different colours (red, purple, blue, green, and yellow).

- Ergonomic squeeze area
- For vaccine vials up to Ø 21 mm
- Autoclavable at 121 °C

Dimensions (W x L x H) mm	PK	Cat. No.	Price EUR
20 x 152 x 35	5	6.492 240	108.43


Cryoware marker set Nalgene™, Type 6313



For durable labelling of cardboard, plastic and cloth material for use at ultra-low temperatures. Non-smudge and non-running. Removable with alcohol. Extra fine point. Two packs available: 1 pack contains one each red, green, black and blue marker while the other pack contains black markers only.

Description	PK	Cat. No.	Price EUR
Assorted	4	9.400 978	25.83
Black	4	9.400 979	25.83

LLG-Temperature block exact, aluminium



Suitable for both cooling and heating, universally usable, uniform temperature distribution within the block, ideal for all temperature-sensitive applications.

Array	Dimensions (W x D x H) mm	PK	Cat. No.	Price EUR
96 x 0.2 ml PCR tubes + 6 x 1.5 ml tubes	118 x 89 x 24	1	9.409 015	154.50
24 x 1.5 ml tubes	115 x 89 x 34	1	9.409 017	137.20
24 x 2.0 ml tubes	115 x 89 x 34	1	9.409 018	141.50
12 x 15.0 ml Centrifuge tubes	75 x 89 x 38	1	9.409 008	124.00

Label printer DYMO® LabelWriter™ 550



- Compact label printer
- Direct thermal printing technology
- Customized label design possible



Compact label printer with direct thermal printing technology for fast and efficient label printing without additional ink cartridges or toner cartridges.

- Print resolution of up to 300 x 300 dpi
- Customised label design with DYMO® Connect for Desktop software
- Printing precise label quantities without cumbersome label sheets
- Automatic energy-saving mode
- PC connection via USB interface

Scope of supply: Label printer, 1 x label starter roll (28 x 89 mm), power adapter, power cable, USB cable, quick start guide

Specifications

Max. label width:	59 mm
Print speed:	62 labels/min.
Dimensions (WxDxH):	127 x 187 x 136 mm
Weight:	640 g
Power supply:	100 ... 240 V, 50/60 Hz, 24 V

Type	PK	Cat. No.	Price EUR
DYMO® LabelWriter™ 550	1	4.687 585	137.99

Cryo labels CryoSTUCK®, rectangular



- For DYMO® LabelWriter™ 5-Series
- Cryo labels for frozen surfaces

Developed for labelling laboratory consumables and containers such as vials, tubes and cryo boxes. These durable, solvent-resistant cryo labels adhere securely to frozen surfaces down to a temperature of -80 °C. Frozen containers can therefore be labelled directly without having to thaw the samples first. The labels also have a permanent adhesive that adheres securely even under extreme conditions, including prolonged storage in liquid nitrogen (-196 °C). Resistant to a wide range of laboratory chemicals, including detergents, alcohols, acetone, xylene and disinfectant solutions.

Cryo labels with SnapPEEL™ technology, the unique shape consisting of an adjoined circle with a rectangle. This allows the labelling of containers and their caps.

Form	Dimensions (diam. x D x W) mm	PK	Cat. No.	Price EUR
rectangular	-x 50.8 x 25.4	1000	4.711 710	118.10
rectangular	-x 50.8 x 6.4	1000	4.711 711	97.90
rectangular	-x 38.1 x 19.1	750	4.711 712	63.80
rectangular	-x 25.4 x 25.4	750	4.711 713	63.80
rectangular	-x 25.4 x 12.7	750	4.711 714	63.80
rectangular and circular	9.5 x 23.9 x 12.7	750	4.711 715	86.60
rectangular and circular	11.1 x 28.6 x 15.9	750	4.711 716	86.60
circular	12.7 x - x -	2000	4.711 717	72.50

LLG-2in1 KITs with Short Thread Vials ND9 (wide opening)



2in1 KITs contain 100 vials (1.5 ml) and 100 closures in an orange PP-Box.

Description	Cover type	PK	Cat. No.	Price
				EUR
clear	Short Thread Cap, blue, hole, Silicon white / PTFE red	100	9.003 560	42.70
clear	Short Thread Cap, blue, hole, Silicon white / PTFE blue, slitted	100	7.621 765	57.10
clear	Short Thread Cap, transparent, hole, Silicon white / PTFE red	100	9.003 561	38.20
clear, labelling field	Short Thread Cap, blue, hole, Silicon white / PTFE blue, slitted	100	9.003 562	57.50
clear, labelling field	UltraClean Short Thread Cap, blue, hole, Silicon white / PTFE red	100	7.970 892	45.50
amber, labelling field	UltraClean Short Thread Cap, blue, hole, Silicon white / PTFE red	100	6.266 871	45.20

b.safe-Caps, GL45, PPS



Typ B

Screw cap for thread GL 45 made of PPS, freely turnable distributor body made of PTFE with female threads UNF 1/4" 28 G for connecting capillary tubing (O. D. 3.2 mm) or a b.safe air valve.

Scope of supply:

Cap A: 2 x connections, 1 x fitting (PFA), 1 x air valve

Cap B: 3 x connections, 2 x fittings (PFA), 1 x blind fitting (PFA), 1 x air valve

Cap C: 4 x connections, 3 x fittings (PFA), 2 x blind fittings (PFA), 1 x air valve

Type	PK	Cat. No.	Price
			EUR
A	1	6.313 834	65.41
B	1	6.313 835	73.80
C	1	6.313 836	76.61

Syringes for GC autosampler from Perkin-Elmer



GC syringes for all Perkin-Elmer autosamplers e.g. Clarus.

- With fixed needle
- Two different needle diameter
- All needles are 70 mm long with a cone-point style
- High reproducibility, low carry-over

Capacity	Gauge (OD) mm	PK	Cat. No.	Price
				EUR
5	23 (0.63)	1	9.221 282	121.10
5	26 (0.47)	1	9.221 281	121.10
5 (Gas tight)	23 (0.63)	1	6.204 955	124.70
5 (Gas tight)	26 (0.47)	1	9.221 283	124.70

Air valves, PP



Red/yellow. With connecting thread UNF 1/4" 28G. Filter membrane made of PTFE/PP with a porosity of 1 µm and integrated non-return valve made of silicone. With service life indicator.

Diam. mm	Life time	PK	Cat. No.	Price
				EUR
20	6 months	2	6.313 842	38.33
20	6 months	10	6.313 843	169.23

Exhaust filters V3.0, GL 14



The exhaust air filters are equipped with three different activated carbon layers, which bind acids and alkalis and adsorb organic solvent vapours.

- Filter media with a very high-performance spectrum for acids and alkalis
- Optimised for binding buffer solutions and solvent vapours
- With splash guard
- 1500 m²/g adsorption surface area
- Supply pack with change indicator



Filter size	Life time	PK	Cat. No.	Price
				EUR
S	3 months	4	4.681 461	177.65
M	6 months	2	4.681 458	143.65
L	12 months	2	4.681 463	169.15

Funnel stands LaboPlast®, PP



White, unbreakable, chemically resistant.
For 2 or 4 funnels. A robust, heavy base provides good stability.
Variable height adjustment up to 450 mm. Thanks to a magnet system, no clamping screws are necessary. The height of the funnel holder can be adjusted easily and flexibly with one hand.

With 2 or 4 aperture reduction inserts for small funnels.
Suitable for funnels with diam. 40 to 180 mm.

To hold funnels piece	Dimensions (W x D x H) mm	PK	Cat. No.	Price EUR
2	140 x 300 x 480	1	9.069 922	90.05
4	150 x 550 x 500	1	9.069 924	121.60

Buchner funnel, borosilicate glass 3.3



New



Buchner Funnel (with slit sieve disc) for Membranes or Paper Filters

- Chemical and high-temperature change resistance
- With a sintered VitraPOR® glass filter disc
- The glass filter disc, which is fitted with a glass disc with approx. 1.8 mm wide slits
- Easy filtrate removal and cleaning

Capacity ml	Funnel diam. mm	Filter diam. mm	PK	Cat. No.	Price EUR
75	52	45 ... 48	1	6.492 454	67.80
125	65	55 ... 60	1	6.492 455	79.85

LLG-Qualitative filter paper, circles



Made from 100% cellulose. Ash content 0.06%. Filtration speed according to DIN 53137. Capacity of separation according to DIN 53135.
Medium fast, pore size 5 to 13 µm.
For fast filtration with fine particles.

Diam. mm	Filtration time secs.	PK	Cat. No.	Price EUR
47	88	100	9.045 801	6.20
55	88	100	9.045 802	6.50

LLG-Filtering apparatus, borosilicate glass



Universally applicable filtration unit made of high-quality borosilicate glass. Wide range of applications for filtration with filter paper or membrane filters (47 mm).

- Large funnel (300 ml) with scale
- Filter flask 1 or 2 litres, with scale
- Safe plastic olive
- Filter plate with porosity 2
- Filter plates with porosity 1 or 3 are optionally available
- All components available as spare parts

Scope of supply: Filter flask NS 45/40, funnel 300 ml, filter holder NS 45/40 with connector GL 14 and filter plate 47 mm (por. 2), clamp

Description	PK	Cat. No.	Price EUR
LLG-Filtering apparatus 1000 ml	1	6.291 850	404.50
LLG-Filtering apparatus 2000 ml	1	6.291 851	455.80

LLG-Extraction thimbles, cellulose



Neutral and fat-free. With excellent retention capacity.

Diam. mm	Length mm	PK	Cat. No.	Price EUR
20	80	25	9.045 701	87.10
22	80	25	9.045 700	75.30
25	100	25	9.045 709	78.30
26	60	25	9.045 707	77.60
28	80	25	9.045 711	77.50
30	80	25	9.045 708	79.00
33	80	25	9.045 702	81.90
33	94	25	9.045 703	90.30
33	100	25	9.045 704	75.20
33	118	25	9.045 706	89.60
43	123	25	9.045 710	121.60

NMR Tube Rack, PP



Polypropylene rack with carrying handles features an upper deck with holes and a lower deck support for tube ends. Stackable. For 72 (6 x 12) tubes with 3 or 5 mm diameter. Autoclavable.

Dimensions (W x D x H) mm	PK	Cat. No.	Price EUR
210 x 110 x 220	1	9.301 065	85.65

NMR tubes, diameter 3 and 5 mm
borosilicate glass 3.3, standard

The NMR tubes are produced with high precision. They are suitable for routine measurements, high-throughput measurements or NMR systems with autosampler at measurement frequencies up to 600 MHz. The tubes are manufactured from borosilicate glass 3.3 which conforms to USP Type I and ASTM E438, Type I, Class A. Please order closing caps separately.

Outer diam. mm	Int. diam. mm	Length mm	PK	Cat. No.	Price EUR
4.95 ± 0.05	4.19 ± 0.05	178	100	9.400 310	134.00
4.95 ± 0.05	4.19 ± 0.05	203	100	9.400 311	142.00


Closing caps for NMR and EPR tubes



The caps are made of durable plastic. For 5 mm NMR tubes and corresponding EPR tubes.

Colour	PK	Cat. No.	Price EUR
red	50	4.688 374	9.39
green	50	4.688 375	9.39
yellow	50	4.688 376	9.39
blue	50	4.688 377	9.39

Pasteur pipettes, soda glass

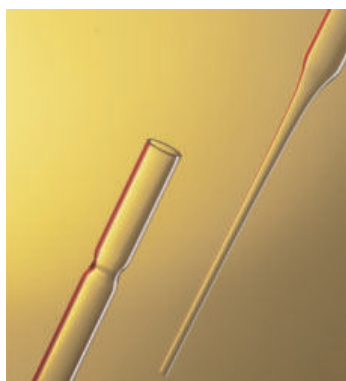

Extra long tip, optimal for NMR applications. With constriction, without cotton wool.

Length mm	PK	Cat. No.	Price EUR
300	1000	4.672 077	1,209.32
350	1000	4.672 078	2,016.30

NMR brushes



For cleaning NMR tubes.

Length mm	PK	Cat. No.	Price EUR
250	5	4.669 337	16.10

Bowl Trolleys



Trolley

- Welded design
- Suitable for plastic tubs 85 l or 100 l
- Height with red tray approx. 760 mm, with a white tray of approx. 840 mm
- 4 swivel castors with solid rubber wheels Ø 75 mm, ball bearings, non-marking tyres
- Powder-coated black-silver effect paint
- Load capacity 100 kg

Bowl, red: PE, 85 litres

Bowl, white: PE, 100 litres

Description	Colour	Dimensions (W x D x H) mm	PK	Cat. No.	Price
Trolley	black-silver	500 x 750 x 720	1	9.148 300	171.40
Bowl	red	540 x 765 x 350	1	9.148 301	76.50
Bowl	white	540 x 900 x 400	1	9.148 302	97.00

Folding steps K70



Made of aluminium, with large steel steps of 30 x 21 cm and anti-slip mats. Narrowly foldable to 5 cm.

- Stands securely due to the non-slip plug-in foot that stands up over the entire surface.
- Folding safety mechanism (safety lock)
- Ergonomic square tube bracket
- Can be loaded up to 150 kg

Number of steps	Height*	Colour	PK	Cat. No.	Price
2	46	black	1	4.668 331	66.76
3	69	black	1	7.623 704	75.62

* Height of first step (cm)

Glove boxes, PMMA/PE



Aluminium frame with panels made of acrylic glass (PMMA), and a base panel made of polyethylene. Front panel with two glove ports and one pair of natural rubber gloves size 9, two lead-ins for cables on the back side (upper left and upper right). Workspace including two hose connectors for gas-filling and aeration and appropriate tubing. Glove box without transfer chamber with 1 x 5 m PVC tubing for gas-filling and 1 x 5 m PE aeration tubing. Glove box with transfer chamber with 2 x 5 m PVC tubing for gas-filling and 2 x 5 m PE aeration tubing.

Glove box with Transfer chamber

Transfer chamber with two doors, external door with latch to prevent accidental opening, the tray extends into the workspace with the opening of the internal door for easy removal of inserted products.

Specifications

Glove boxes with and without Transfer chamber

Capacity Box:	290 l
Internal Dimensions Box (W x D x H):	850 x 540 x 650 mm
Max. Load Box:	40 kg
Inlet opening:	diam. 190 mm
Hinged lid opening (W x H):	850 x 425 mm
Working Temperature range:	-20 ... 70 °C
Glove boxes with Transfer chamber	
Capacity Transfer chamber:	24 l
Internal Dimensions Transfer chamber (W x D x H):	220 x 320 x 275 mm
Max. Load Transfer chamber:	3 kg

Type	External dimensions (W x D x H) mm	PK	Cat. No.	Price
Glove box	890 x 600 x 700	1	6.267 157	3,927.29
Glove box with Transfer chamber	1210 x 600 x 700	1	6.258 807	5,392.54

Gloves for Glove boxes, natural rubber



Ambidextrous. For openings of Ø 190 mm.

- Minimal static charge
- Tear, perforation and abrasion resistant
- High flexibility

Size	PK	Cat. No.	Price
7	1	6.260 950	405.17
8	1	7.671 922	405.17
9	1	7.671 923	497.91

Overshoe dispenser HYGOMAT COMFORT/CLEANROOM

Franz
mensch

- No electrical power needed
- Easy to use, no need for bending over
- Easy and quick handling
- With handrail for extra comfort
- Capacity: two packs of overshoes
- With a window for easy control of rest capacity
- Refilled with overshoes within seconds
- Weight: 21 kg

COMFORT



Description	PK	Cat. No.	Price
			EUR
HYGOMAT COMFORT, 740 x 300 x 730 mm	1	6.257 283	495.55
HYGOMAT CLEANROOM, stainless steel, 740 x 300 x 730 mm	1	6.269 779	606.05

Overshoes for dispenser HYGOMAT

Franz
mensch



6.257 285:

- Polypropylene nonwoven, CPE coated, white
- Waterproof sole
- Very slip resistant
- Perfect for a smooth surface

6.257 286:

- PP overshoe with CPE sole, blue
- Polypropylene nonwoven
- At the top nonwoven, and at the bottom strong waterproof CPE sole
- Very tearproof and slip-resistant

6.257 287:

- CPE (Cast Polyethylene), blue
- Strong quality, approx. 60 micron
- Light protection against liquids

6.257 288:

- Polypropylene nonwoven, blue
- At the bottom structure made of CPE
- Permeable to air and light slip-resistant
- For dry areas

Length	PK	Cat. No.	Price
mm			EUR
440	80	6.257 285	18.96
440	70	6.257 286	16.17
470	110	6.257 287	14.79
460	100	6.257 288	16.32

Adhesive Mats Sticky Mat

ERGOMAT



The Sticky Mat provides a fast, convenient, and reliable way to clean shoe soles or other items before entering a clean and sanitary area. Sticky Mats significantly reduce traffic-borne contaminants.

Ergomat White Sticky Mats are produced in a 46 x 114 cm sheet, sold in pads of 30 sheets, with 10 pads per box (300 sheets total.)

Description	Colour	PK	Cat. No.	Price
				EUR
Frame for Cleanroom mats Sticky Mat	grey	1	6.272 245	76.00
1 mat of 30 sheets	white	10	6.272 241	99.00
1 mat of 30 sheets	blue	10	6.272 242	99.00
Set of 10 mats of 30 sheets + 1 frame	white	1	6.272 243	150.00
Set of 10 mats of 30 sheets + 1 frame	blue	1	6.272 244	150.00

Cleanroom Wipes Sontara® MicroPure, polyester/cellulose



Sontara® MicroPure nonwoven styles (wood pulp/polyester) are engineered for cleanroom use and combine the absorbency of a natural fibre with the cleanliness and strength of a synthetic fibre in the same fabric. No binders or chemical treatments are used to manufacture them. The high cleanliness and purity are ensured by low extractable level and ion content as well as extremely low particle generation by the material itself. The fabric styles offer high particle and liquid absorbency due to their cellulose content.

Type	Dimensions	Cleanroom Class	PK	Cat. No.	Price
	mm				EUR
MicroPure 100	305 x 305	ISO 5 + 6	150	9.390 185	50.10
MicroPure 100	224 x 224	ISO 5 + 6	300	9.390 186	49.61
MicroPure AP	305 x 305	ISO 6 - 9	150	9.390 187	51.45
MicroPure AP	224 x 224	ISO 6 - 9	300	9.390 188	48.88
MicroPure SV	305 x 305	ISO 7 - 9	250	9.390 189	53.29
MicroPure SV	224 x 224	ISO 7 - 9	500	9.390 190	65.54

Dispenser uvex one2click and Wall-mounted dispenser

uvex one2click: easy-to-use and robust wall-mounted dispenser.

Wall-mounted dispenser: Plexiglas wall-mounted dispenser, suitable for uvex x-fit, uvex com4-fit, uvex one-fit, uvex xtra-fit, uvex hi-com, uvex whisper, uvex whisper+.

Earplugs are not included.



Description	PK	Cat. No.	Price
			EUR
uvex one2click dispenser	1	6.239 985	95.15
Wall-mounted dispenser	1	7.940 554	69.30

Earplugs, Refill packs



The right solution for every auditory canal: Uvex ear protection plugs are available in sizes S, M and L. Their ergonomic shape offers a high wearing comfort. The soft PU foam adapts perfectly to the auditory canal, providing optimal protection.

Refill packs for uvex one2click dispenser or wall box dispenser.

Type	Size	For	PK	Cat. No.	Price
					EUR
com4-fit	S	Wall-mounted dispenser	200	9.005 028	90.48
com4-fit	S	uvex one2click	300	6.285 529	126.50
x-fit	M	Wall-mounted dispenser	200	6.233 602	90.48
x-fit	M	uvex one2click	300	6.268 846	126.50
xtra-fit	L	Wall-mounted dispenser	200	6.285 528	90.48
xtra-fit	L	uvex one2click	250	6.285 531	126.50
xact-fit	M	uvex one2click	400	6.285 530	168.58
x-fit	M	Wall-mounted dispenser	200	6.239 986	84.15

Half face mask BariMask HF



- With one inhalation valve and two side exhalation valves
- Folding magnetic "Quick-Lock" buckle



BariMask HF with round thread connection Rd40. The innovative "Quick-Lock" connection of the neck strap makes it easy to put on the half-face mask and therefore quicker to use.

- Corresponds to standard EN 140:1998
- With round thread connection Rd 40 according to DIN EN 148-1
- One inhalation valve and two side exhalation valves
- Magnetic buckle on the neck strap
- Rolling straps with adjustable strap sliders
- Safe identification and documentation due to integrated RFID transponder

Type	PK	Cat. No.	Price
			EUR
Half face mask BariMask HF	1	6.523 581	64.87

Screw-Type Filters for BariMask HF



The filters are tested and approved to EN143/EN 14387. Offer very low breathing resistance. Individually sealed in PE bags and packed in outer boxes.

Description	Type	PK	Cat. No.	Price
				EUR
Gas filter	A2	1	9.005 558	10.90
Gas filter	B2	1	9.005 559	12.98
Gas filter	K2	1	9.005 561	11.00
Gas filter	ABE2K1	1	9.005 563	16.68
Gas filter	AX	1	6.200 208	15.17
Particle filter	P3 R	5	6.289 581	35.14
Combined filter	AX P3 R D	1	6.227 097	20.81
Combined filter	A2 P3 R D	1	7.626 397	15.97

Safety Eyeshields 5X2

The 5X2 glasses are designed to adapt seamlessly to any spectacle frame. They offer the same level of protection as conventional glasses but are fully compatible with your prescription glasses.

- Perfect integration with any prescription spectacles
- Temples with rubber or matt finish
- Frame made of new material
- Integrated side shields
- Polycarbonate lens
- Scratch-resistant and anti-fog
- ISO 16321 and ANSI certified
- Lens clear (U UL1.2 DT)

New



Type	PK	Cat. No.	Price
			EUR
Essential - Clear	1	6.522 349	13.90
Advanced - Clear	1	6.522 350	23.90
Advanced Hybrid	1	6.522 351	31.90
Advanced Full-vision goggles	1	6.522 352	35.90

Colony Counter CC-200, manual



Cole-Parmer®
an antylla scientific company

- Acoustic counting by pressure
- Pressure individually adjustable
- Antimicrobial protection with BioCote®



- Pressure sensitive counting
- Pressure can be adjusted
- Audible confirmation
- Choice of light or dark background
- Bright white energy-saving LED lighting
- Average count facility
- With BioCote® antimicrobial protection
- Connectivity to printer or computer

Scope of supply: Device with two Wolffhuegel graticules and dish centring adapters to facilitate use with 50 to 90 mm dishes.

Please order magnifiers separately.

Specifications

Digital display:	3 digit LED
Lighting:	White LED
Magnifier glass:	1.7x and 3x (option)
Counter:	0 to 999
Petri dishes:	diam. 50 to 90 mm
Dimensions (W x D x H):	310 x 300 x 140 mm
Weight:	1.5 kg
Power supply:	120-230 V, 50/60 Hz, 70 W
Warranty:	3 years

Type	PK	Cat. No.	Price
CC-200	1	9.645 280	EUR 909.70

Accessories for Colony Counter CC-200

Description	PK	Cat. No.	Price
			EUR
Magnifiers 1.7x	1	9.645 281	108.95
Magnifiers 3x	1	6.223 318	131.40
Wolffhuegel graticule/segmentation discs for colony counter	10	6.238 272	87.31
Centering adapter	2	6.242 195	28.06
Protective discs	5	6.241 644	71.66

Anaerobic jars, stainless steel

schuett®biotec.de



small



standard



large



eco



crystal



crystal eco

For the cultivation of anaerobic and microaerophilic microorganisms in a defined and rapidly generated gas atmosphere. The requested atmosphere may be reached under ideal conditions by two methods. Either by using chemical gas packs (anaerobe systems) or by manually evacuating the jars with a vacuum pump and flushing with gas afterwards (e.g. with nitrogen), in this case, no chemical accessories are needed (except anaerobic jar eco and crystal eco).

Methods for reaching anaerobic conditions: 3 x times evacuating and filling gas, flushing with gas for 5 minutes and chemical gas production (GasPacks) for Anaerobic jars "small", "standard", "large" and "crystal". For Anaerobic jar "eco" flushing with gas for 5 minutes (Using GasPack-Kits).

Type	Capacity	Int. diam. mm	Int. height mm	PK	Cat. No.	Price
	l					EUR
small*	2	120	170	1	9.520 051	289.00
standard*	3	120	270	1	9.520 056	309.00
large*	6	175	260	1	9.520 050	479.00
eco**	3	120	270	1	9.520 057	269.00
crystal***	3	120	270	1	9.520 058	399.00
crystal eco****	3	120	270	1	6.287 615	299.00

*Stainless steel jar with UV-resistant plastic lid (2 valves, 1 manometer)

**Stainless steel jar with UV-resistant plastic lid (ventilation screw)

***Transparent polycarbonate jar and lid (2 valves, 1 manometer)

****Polycarbonate jar with UV-resistant plastic lid (ventilation screw)

Accessories for anaerobic jars

Type	To hold dishes	PK	Cat. No.	Price
	quantity			EUR
Rack "standard" (for "standard", "large", "eco", "crystal")	15 (60 to 100 mm dia.)	1	9.520 053	56.99
GasPack-Kit "anaerobic" (1 x 3.5 l)		10	9.520 064	119.60
Anaerobic Indicator (test strip)		100	9.520 067	223.60

Gel electrophoresis tank MultiSUB Mini 7



The MultiSUB mini is the smallest device in the series, designed for small and medium sample volumes. The small buffer volume of 225 ml increases the effectiveness of the analysis.


Supplied with: 7 x 7 cm UV Tray, 2 x 8 sample combs.

Specifications

Gel dimensions (W x L):	7 x 7 cm
Unit dimensions (W x L x H):	21 x 9 x 9 cm
Max. sample capacity:	7 x 7 cm tray, 32 samples

Description	PK	Cat. No.	Price
MultiSUB Mini 7	1	6.258 373	EUR 469.26

DNA Markers for Gel Electrophoresis, CSL-MDNA

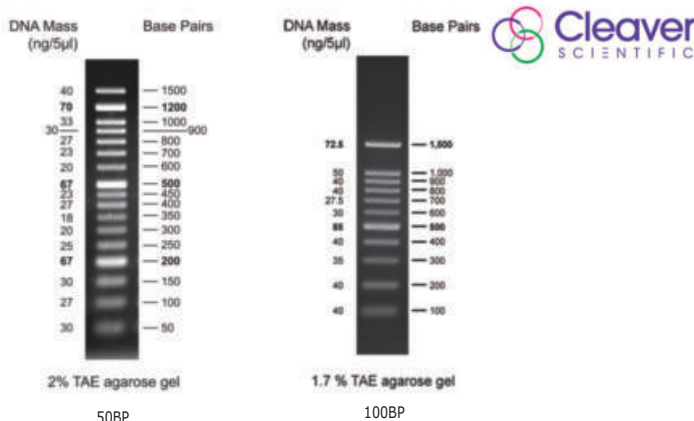

The ready-to-use DNA markers run precisely and produce a sharp, well-defined ladder. The markers contain high-intensity reference bands and may be used to perform size comparisons with DNA molecules ranging from the smallest of PCR fragments to large, linearised cosmid vectors.

- Up to 19 bands
- Isolated from restrictive plasmids
- 6 months stable at room temperature
- 12 months shelf life at 4 °C
- 24 months storable at -20 °C
- Vials of 500 µl

Type	Size	Bands	Reference bands	PK	Cat. No.	Price
50BP	50 bp - 1500 bp	17	200 bp, 500 bp	1	6.256 963	EUR 76.16
100BP	100 bp - 1500 bp	11	500 bp, 1500 bp	1	6.256 961	EUR 42.84
100BPH	100 bp - 3000 bp	12	500 bp, 1500 bp	1	6.256 960	EUR 42.84
1KBPPLUS	100 bp - 10 Kb	13	1 Kb, 3 Kb	1	4.669 511	EUR 42.84

LLG-PCR tubes, PP



Suitable for standard PCR and qPCR



New

LLG-PCR tubes with flat caps are suitable for standard PCR/qPCR thermal cyclers. The uniform, thin tube wall ensures optimum heat transfer and minimises condensation. The ergonomic cap design makes it easy to open and close the tubes with one hand. The V-shaped bottom allows total sample recovery. LLG-PCR tubes are autoclavable as well as RNase-, DNase-, and pyrogen-free. Withstands centrifugation up to 18000 x g in a fixed-angle rotor and up to 500 x g in a swing-out rotor.

Volume	Cover type	PK	Cat. No.	Price
ml				EUR
0.2	Flat lid	500	4.704 897	EUR 32.00

LLG-PCR tubes, PP, strips of 8





New

LLG-PCR tubes are suitable for standard PCR thermal cyclers. The uniform, thin tube wall ensures optimum heat transfer and minimises condensation. The V-shaped bottom allows total sample recovery. LLG-PCR tubes are autoclavable as well as RNase-, DNase-, and pyrogen-free.

Volume	Cover type	PK	Cat. No.	Price
ml				EUR
0.2	Attached lid	120	4.704 898	EUR 129.00
0.2	separate cap strips	120	4.704 899	EUR 111.00

96-Well PCR Rack, PP



- This working/storage rack is designed to accommodate 96 pieces of 0.2 ml PCR tubes or strips of 8 and 12 tubes.
- Tube wells are easily identified with alphanumeric, embossed numbers and letters.
- Translucent clear cover protects the tubes from dust and has a non-slip surface to allow safe storage of multiple racks.
- Dimensions (W x D x H): 125 x 88 x 31 mm

For tubes	PK	Cat. No.	Price
ml			EUR
0.2	1	6.255 804	EUR 7.60

Laboratory bottles protect+ DURAN®, GL 45, with retrace code



Highly transparent. The coating provides scratch, leak and splinter protection and is ideally suited to both the transport and storage of hazardous media or valuable samples.

- Coating made of polyamide
- With dust cap
- Graduated
- UV protection up to approx. 380 nm
- DIN ISO 4796-1
- USP compliant

Nominal capacity ml	PK	Cat. No.	Price EUR
100	1	4.693 738	23.26
250	1	4.693 740	24.61
500	1	4.693 742	29.21
1000	1	4.693 744	40.25

Square shape laboratory bottles, DURAN®, with retrace code



Thanks to its angular shape, the DURAN® square bottle fits particularly well and securely in the hand. You also save space and costs, whether in the autoclave, drying cabinet, oven, storage or dishwasher. With a screw cap and pouring ring. Maximum temperature: 140 °C.

- With Retrace code (Batch identification), Certificate available via the Internet
- Neutral glass/Type I glass acc. to USP/EP and JP

Capacity ml	Width mm	Height* mm	Neck thread GL	PK	Cat. No.	Price EUR
100	50	109	32	1	9.072 076	9.14
250	64	143	45	1	9.072 077	10.27
500	78	181	45	1	9.072 078	12.84
1000	94	222	45	1	9.072 079	18.26

*Height mm incl. cap

Laboratory Bottle system DURAN® YOUTILITY



- Specially shaped gripping zones on both sides of the bottle for easier and safer handling
- With the new YOUTILITY bottle thread opening or closing the bottle is significantly faster. The thread is fully compatible with DIN GL 45 closures and other accessories
- The slimmer YOUTILITY bottle shape allows more optimal use of limited space in autoclaves and laboratory refrigerators
- The YOUTILITY bottle has an integrated Retrace Code to allow full product traceability.
- Each DURAN® YOUTILITY bottle is supplied as a complete system, with a pouring ring (cyan polypropylene) and a GL 45 cap (cyan polypropylene)

Capacity ml	Ext. diam. mm	Height mm	PK	Cat. No.	Price EUR
125	55	124	4	9.071 679	37.24
250	66	158	4	9.071 678	41.56
500	78	193	4	9.071 677	51.72
1000	93	253	4	9.071 676	73.04

LLG-Bottles, wide mouth, HDPE



Suitable for food. With carrying handle. Ideal for containing liquids, powders and granules. Very strong and durable quality for extended use over time. The bottles can be used at temperatures from -40 to +80 °C.

Capacity Litres	Body diam. mm	Height mm	PK	Cat. No.	Price EUR
5	170	350	1	9.139 938	30.70
10	210	420	1	9.139 939	41.60

Volumetric Flasks, Borosilicate Glass 3.3, Class A, Blue Graduations, with Glass Stoppers



All BLAUBRAND® volumetric flasks are delivered with batch number and one batch certificate included per pack.

- DIN EN ISO 1042
- DE-M marking
- Ring marks and inscriptions in highly contrasting blue enamel
- Calibrated to contain (IN)

Nominal capacity ml	Tolerance ± ml	Joint size (NS)	PK	Cat. No.	Price EUR
5	0.04	10/19*	1	7.018 535	21.65
10	0.04	10/19*	1	7.018 546	21.80
20	0.04	10/19	1	7.018 536	22.25
20	0.06	12/21*	1	6.238 693	22.65
25	0.04	10/19	1	7.018 537	22.25
25	0.06	12/21*	1	7.018 553	23.05
50	0.06	12/21	1	7.018 538	24.25
50	0.10	14/23*	1	7.018 549	24.65
100	0.10	12/21	1	7.018 539	25.60
100	0.10	14/23	1	7.018 550	26.20
200	0.15	14/23	1	7.018 540	28.75
250	0.15	14/23	1	7.018 541	29.80
500	0.25	19/26	1	7.018 542	35.55
1000	0.4	24/29	1	7.018 543	62.55
2000	0.6	29/32	1	7.018 544	83.40

*Wide mouth

Volumetric flasks for determination of oil content, SILBERBRAND, Borosilicate glass 3.3



DIN 51 368. For determination of oil content in aqueous oil emulsions (e.g. drilling oil). With NS19/26, hollow glass stoppers. Graduations and inscriptions in highly contrasting white enamel. Capacity 100 ml, tolerance ± 0.2 ml. Calibrated to contain (IN).

Subdivisions: 0 to 5 ml: 0.1 ml, tolerance: ± 0.1 ml.
Subdivisions: 5 to 30 ml: 0.5 ml, tolerance: ± 0.5 ml.

Sample volume ml	PK	Cat. No.	Price EUR
100	1	9.276 880	110.95

Volumetric flasks, plastic, class B, PE NS-stoppers



To DIN EN ISO 1042, adjusted to IN, with PE standard ground joint stoppers.

Capacity ml	Tolerance ± ml	Joint size (NS)	PK	Cat. No.	Price EUR
25	0.08	10/19	1	9.276 590	6.10
50	0.12	12/21	1	9.276 591	7.00
100	0.20	14/23	1	9.276 592	7.40
250	0.30	14/23	1	9.276 593	10.80
500	0.50	19/26	1	9.276 594	12.70
1000	0.80	24/29	1	9.276 595	16.20

Measuring cylinders, PP, tall form, class B, blue moulded graduations



Highly transparent. With easily readable, raised, embossed blue scale and ring marks at the primary scale points. Calibrated 'In'. Food-safe product according to regulation (EU) No. 10/2011.

Capacity ml	Grad. ml	Tolerance ± ml	Diam. mm	Height mm	PK	Cat. No.	Price EUR
10	0.20	0.2	15	145	1	9.274 408	5.39
25	0.50	0.5	22	170	1	9.274 409	6.02
50	1.00	1.0	27	200	1	9.274 410	6.48
100	1.00	1.0	33	250	1	9.274 411	7.76
250	2.00	2.0	44	315	1	9.274 412	11.97
500	5.00	5.0	58	360	1	9.274 413	15.86
1000	10.00	10.0	69	440	1	9.274 414	21.65
2000	20.00	20.0	97	482	1	9.274 415	39.07

Bottle top burette Titrette®



- Fast and reliable titration
- Highest precision
- No switching between filling and titration necessary



BRAND

For fast and reliable titration with maximum precision, even where space is limited and independent of a power supply - in the laboratory, in production or on the move. Important for all users who want to work within the error limit of class A according to DIN EN ISO 385, as with glass burettes (e.g. in the pharmaceutical industry). If required, accurate up to 20 ml to 3 decimal places.

- High accuracy
- Smooth-running operation for sensitive, drop-wise titration and fast filling of the device
- Compact design
- Light and stable, easy handling
- No switching between fill and titrate
- Simple maintenance
- Cleaning and parts replacement right in the lab

Items supplied: Titrette® bottle-top burette, DE-M marking, performance certificate, telescoping filling tube (170 to 330 mm), recirculation tube, 2 x 1.5 V batteries (AAA/UM4/LR03), 4 x PP bottle adapters (GL45/32, GL 45/38, GL 45/S40 and GL32/NS 29/32), 2 coloured light shield inspection windows, operating manual



Volume ml	Accuracy max. vol. (± R%)	Precision max. vol. (≤ CV%)	Interface	PK	Cat. No.	Price EUR
25	0.07	0.025	without	1	9.271 332	820.41
50	0.06	0.02	without	1	9.271 333	820.41
10	0.10	0.05	incl.	1	9.271 338	1,053.83
25	0.07	0.025	incl.	1	9.271 334	1,053.83
50	0.06	0.02	incl.	1	9.271 335	1,053.83

LLG-Disposable Reagent reservoirs economy, PS



Made from polystyrol. Designed for use with multi-channel pipettes and can accommodate up to 12-channel standard pipettes. Angled sides and a V-shaped bottom allow maximum recovery of reagents. DNase-, RNase- and pyrogen-free certified.

Capacity ml	Description	PK	Cat. No.	Price EUR
25	non-sterile, bulk	100	6.282 144	58.16
25	sterile, single-packed	100	6.282 145	108.24
50	non-sterile, bulk	100	6.282 146	71.28
50	sterile, single-packed	100	6.282 147	141.20

Single channel microliter pipettes Acura® manual 835, variable



- Effortless activation
- Smart and reliable volume adjustment
- Precision digital display visible at all times
- Justip™ adjustable tip ejector fits most tips
- Swift-set user calibration system
- Shock, UV-light and autoclaving resistance

Capacity µl	Increments µl	Accuracy max. vol. (± R%)	Precision max. vol. (≤ CV%)	PK	Cat. No.	Price EUR
200 - 2000	0.002	0.5	0.2	1	6.230 186	284.50
200 - 2000*	0.002	0.5	0.2	1	6.259 412	306.00
500 - 5000	0.01	0.6	0.3	1	9.411 598	293.00
500 - 5000*	0.01	0.6	0.3	1	7.900 943	327.50
1000 - 10000	0.01	0.5	0.2	1	9.411 599	293.00

* Pasteur

Pipette tips Qualitix®, natural, autoclavable



9.411 449



9.411 502

- DNase, RNase, ATP and pyrogen-free tips
- Compatibility with various pipette brands

Capacity ml	Length mm	Description	PK	Cat. No.	Price EUR
2	115.5	Macro tips	500	9.411 501	87.20
5	123.2	Macro tips, graduated	500	9.411 449	92.50
10	150.0	Macro tips	300	9.411 502	98.50


LLG-Volumetric pipettes, soda glass, class AS, 1 mark, blue graduated

- DIN EN ISO 648, DIN 12687
- Conformity-certified
- With batch date identification
- Calibrated to deliver (EX)
- Ring mark and inscriptions in permanent blue enamel



Nominal capacity ml	Tolerance ± ml	Length mm	PK	Cat. No.	Price EUR
1	0.007	310	10	6.272 207	46.30
2	0.010	330	10	6.272 208	46.40
3	0.010	360	10	6.272 209	47.50
4	0.015	360	10	6.272 210	48.70
5	0.015	400	10	6.272 211	49.80
10	0.020	440	10	6.272 212	54.60
15	0.030	455	10	6.272 213	74.90
20	0.030	510	10	6.272 214	77.20
25	0.030	520	10	6.272 215	79.60
50	0.050	540	10	6.272 216	106.90

Graduated pipettes, AR-glass®, Class AS, amber graduations, type 3

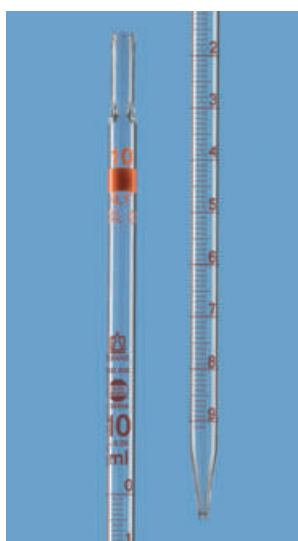

BLAUBRAND® ETERNA, DE-M marking, AR-glass®, DIN EN ISO 835. Type 3 (Zero point at the top), total delivery. Calibrated to deliver (TD, Ex). Waiting time 5 seconds. Ring mark and inscription in ETERNA amber stain.

All BLAUBRAND® graduated pipettes are supplied with a batch number and an accompanying batch certificate in the original packaging.

Volume ml	Graduations ml	Tolerance ± ml	Suitable for cotton plugs	PK	Cat. No.	Price EUR
0.5	0.01	0.006	-	1	9.272 031	7.75
1	0.01	0.007	-	1	9.272 032	6.10
1	0.01	0.007	+	1	7.018 397	8.46
2	0.02	0.010	-	1	9.272 033	6.10
2	0.02	0.010	+	1	7.018 398	8.46
5	0.05	0.030	+	1	7.060 678	7.35
5	0.1	0.030	+	1	9.272 034	7.15
10	0.1	0.05	+	1	9.272 036	7.35
20	0.1	0.10	+	1	7.018 413	15.00
25	0.1	0.10	+	1	9.272 037	15.00

Pipette controller accu-jet® S



- Precise volume adjustment
- Integrated parking position for parking



For precise pipetting of large and small volumes. The adjustable motor speed allows to switch between free flow and rapid blow-out of the liquid.

- One-hand operation
- For glass and plastic pipettes from 0.1 to 200 ml
- Precise volume setting
- Integrated rest position
- Valve system for exhaust liquid vapours
- Membrane filter and safety valve to protect against fluid penetration
- Robust, powerful motor for fast filling times (25 ml in 3 seconds)
- 8 hours of continuous pipetting with a 10 ml pipette without recharging
- Two-colour battery charge indicator
- Service-friendly and sustainable

Environmental benefits:

Sustainable packaging: Cardboard with approx 90% recycled content
Renewable energy: Production using 100% eco-friendly energy from certified hydro-electric power plants and energy generated on the premises as surplus from a cogeneration unit

Scope of supply:

Pipette controller accu-jet® S, nickel-metal hydride battery, universal adapter (100 - 240 V, 50/60 Hz), with adapters for UK/EU/AUS/US, wall support, 2 sterile spare membrane filters (0.2 µm)

Colour	Description	PK	Cat. No.	Price EUR
anthracite	with universal AC adapter	1	4.682 331	346.71
berry	with universal AC adapter	1	4.682 332	346.71
petrol	with universal AC adapter	1	4.682 333	346.71
amethyst	with universal AC adapter	1	4.682 334	346.71
anthracite	without universal AC adapter	1	9.281 073	324.63
berry	without universal AC adapter	1	9.281 070	324.63
petrol	without universal AC adapter	1	9.281 071	324.63
amethyst	without universal AC adapter	1	9.281 072	324.63

LLG-Pasteur Pipettes, PE



Manufactured from transparent PE. Graduated.


Type	Capacity ml	Length mm	PK	Cat. No.	Price EUR
non-sterile	1	150	500	4.672 670	18.72
non-sterile	3	150	500	4.672 671	18.96
sterile, single-wrapped	1	150	1000	9.401 085	73.20
sterile, single-wrapped	3	150	1000	9.401 084	75.36



Disposable multi-zone sampler PharmaDispo, PS



- Simultaneous extraction from different layers or zones
- Ergonomic one-hand operation

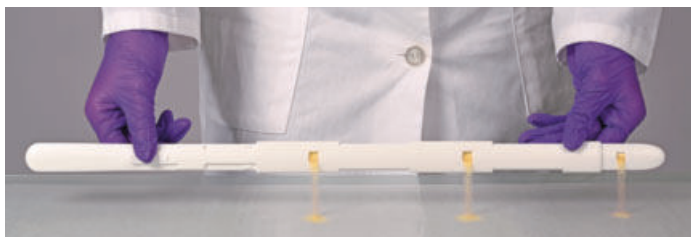

The three separate sampling chambers allow simultaneous sampling from different layers or zones. A sliding mechanism with an end stop makes it easy to open and close the sampler.

- Ergonomic one-handed operation
- Clean room manufactured, individually packaged
- 3 chambers
- Length: 500 mm, penetration depth: 320 mm
- Food safe

New



Nominal capacity ml	Sterile	PK	Cat. No.	Price
0.05	-	20	4.710 598	EUR 152.30
0.1	-	20	4.710 600	EUR 152.30
0.5	-	20	4.710 602	EUR 152.30
1	-	20	4.710 604	EUR 152.30
0.01	+	20	4.710 597	EUR 162.20
0.05	+	20	4.710 599	EUR 162.20
0.1	+	20	4.710 601	EUR 162.20
0.5	+	20	4.710 603	EUR 162.20
1	+	20	4.710 605	EUR 162.20

Sampling Dippers DispoDipper LaboPlast®/SteriPlast®, PP, blue transparent



Cleanroom-manufactured, scaled scoop for sampling, especially for disposable use. The blue colour makes it perfect for use in the food, animal feed and pharmaceutical industries. The can be sealed liquid-tight after sampling.

- Individually packaged and optionally sterilised by gamma rays (SteriPlast®)
- Production and packaging according to clean room class 7
- Complies with EU food requirements and FDA regulations



Capacity ml	Description	PK	Cat. No.	Price
50	LaboPlast®	20	6.290 524	EUR 25.95
50	SteriPlast®	20	6.290 525	EUR 33.50
100	LaboPlast®	20	4.662 230	EUR 37.40
100	SteriPlast®	20	4.662 231	EUR 47.60
250	LaboPlast®	20	4.662 232	EUR 42.35
250	SteriPlast®	20	4.662 233	EUR 54.00

Micro-Sampler, stainless steel



Without tip. V2A stainless steel. Sterilizable. GMP/FDA compliant. Specially for collecting small amounts of powder. Volumes of 0.2, 0.5, 1, 2, 5 and 10 ml can be taken simply, quickly and cleanly from different depths of sacks or containers. The Micro-Sampler tips are interchangeable so that tips with different volumes can be used.

Accessories for Micro-Sampler

Tips for Micro-Sampler.



Tube diam. mm	Length mm	PK	Cat. No.	Price
12	550	1	9.303 890	EUR 271.80
12	850	1	9.303 891	EUR 301.65
12	1200	1	9.303 892	EUR 328.35
25	550	1	9.303 895	EUR 353.50
25	850	1	9.303 896	EUR 381.90
25	1200	1	9.303 897	EUR 406.95

Nominal capacity ml	For diam. mm	PK	Cat. No.	Price
0.2	12	1	9.303 900	EUR 81.75
0.5	12	1	9.303 901	EUR 81.75
1.0	12	1	9.303 902	EUR 81.75
2.0	25	1	9.303 905	EUR 111.65
5.0	25	1	9.303 906	EUR 111.65
10.0	25	1	9.303 907	EUR 111.65

Laboratory mixer, BagMixer® 400



For sample preparation with adjustable paddle system

For sample preparation with an easily adjustable paddle system. The BagMixer® is available in 3 sizes and blends all sample types before their microbial analysis.

BagMixer® 400 P with a stainless steel door.

BagMixer® 400 W and 400 CC with see-through glass door.

Click & clean® System (only BagMixer® 400 CC): removable and autoclavable paddles.

All units have a 3-year warranty and life guarantee for shock absorbers and window doors.

interscience



400 CC

Type	Volume ml	Dimensions (W x D x H) mm	PK	Cat. No.	Price EUR
400 P	50 ... 400	260 x 390 x 290	1	6.204 551	2,390.40
400 W	50 ... 400	260 x 390 x 290	1	6.224 287	3,136.90
400 CC	50 ... 400	260 x 420 x 265	1	9.570 098	4,746.80

Blender bags, BagSystem®



PolySilk 100

P 400

interscience

BagLight®: Bag without filter, for all microbiological laboratory applications.

BagPage® and BagPage®+: Homogenizer bag with a micro-perforated filter that extends over the entire width of the sample bag (full-size filter).

BagFilter® P: Bag with non-woven filter (side filter). Removal of the filtered solvent with BagPipet®. With pre-cut for pipetting.

BagFilter® XF: Blender bags with lateral filter. Bag with an ultra-fine lateral filter (<20 µm). Suitable for use with capillary analysis systems (PCR, flow cytometry) and samples with fine particles (powder, dust).

Type	Description	PK	Cat. No.	Price EUR
BagLight® PolySilk 100	plain bag, sleeve 25	500	9.570 075	61.75
BagOpen® 400	bag opener	1	9.570 084	97.57
BagLight® PolySilk 3500	plain bag, sleeve 25	500	9.570 077	209.95
BagPage® + 400	full-size filter bag, sleeve 25	500	9.570 081	218.50
BagFilter® P 400	side filter bag, sleeve 25	500	9.570 078	218.50
BagFilter® XF 400	side filter bag, sleeve 25	500	6.325 973	231.99

Disperser OV 625/OV 725 Digital System



VELP
SCIENTIFICA

- Quick and easy installation of the dispersing tools
- Overtemperature alarm and alarm in the event of motor failure
- User-friendly, clearly laid out control panel



OV 625

OV 725

Digital disperser for fast homogenizing, emulsifying, suspending, as well as mixing biological samples, pharmaceuticals, cosmetics, and food. The comfortable rotating knob allows precise electronic speed settings and controls up to 25000 rpm.

- User-friendly, clear control panel shows speed parameters at a glance
- Maximum safety in daily laboratory operation thanks to overtemperature alarm and motor failure alarm
- Special alarm indicates improper installation or absence of a dispersion tool
- Quick and easy dispersing tool installation

Scope of supply: Disperser, stand with double rod, dispersing tool D20-S20C-P-R20S, tool disassembly kit

Type	Volume ml	Rotation speed rpm	Dimensions (W x D x H) mm	PK	Cat. No.	Price EUR
OV 625	0.2 ... 2,500	3,000 ... 25,000	92 x 130 x 280	1	4.691 690	2,060.00
OV 725	0.2 ... 2,500	2,000 ... 25,000	100 x 235 x 280	1	4.699 483	2,771.00



Ultrasonic baths Elmasonic Xtra



- With stainless steel lid and drain tap
- Automatic safety switch-off with wake-up function
- Eco mode for gentle cleaning with quieter operation

New

Developed for the toughest cleaning tasks, these devices combine the most advanced technology with proven quality and are therefore ideal for applications where high cleanliness and maximum reliability are essential. They effortlessly cope with even the most stubborn dirt such as oils, greases, abrasive pastes or organic contaminants and deliver perfect results. Especially, suitable for continuous use.

- With welded tanks made of cavitation-resistant stainless steel
- Dynamic mode for more intensive cleaning with higher cleaning power
- Sweep and Pulse modes alternately for homogeneous and powerful cleaning
- Eco mode for gentle cleaning with quieter operation
- Timer from 1 to 30 min or continuous operation
- Automatic safety switch-off with wake-up function
- Dry-run detection

Scope of supply: Ultrasonic bath, stainless steel lid, mains cable (2 m), manual



Type	Capacity	External dimensions (W x D x H) mm	PK	Cat. No.	Price
	L				EUR
Xtra 40	4.0	435 x 215 x 330	1	4.705 729	984.00
Xtra 60	6.3	500 x 215 x 330	1	4.705 730	1,599.00
Xtra 120	14.2	500 x 315 x 380	1	4.705 731	1,968.00
Xtra 180	19.7	530 x 380 x 380	1	4.705 732	2,419.00
Xtra 300	30.0	700 x 380 x 380	1	4.705 733	1,148.00

Insert baskets for ultra sonic cleaning units Elmasonic Xtra, Stainless steel



For bath type	Dimensions (W x D x H) mm	PK	Cat. No.	Price
				EUR
Xtra 40	195 x 105 x 95	1	4.688 714	58.00
Xtra 60	255 x 105 x 95	1	4.688 715	70.00
Xtra 120	250 x 195 x 135	1	4.688 718	150.00
Xtra 180*	280 x 255 x 135	1	4.688 720	175.00
Xtra 300*	450 x 255 x 135	1	4.688 721	195.00

* Plastic handles

Sieve cleaning module SRH 4/200



Sieve cleaning module made of stainless steel with integrated rotary unit for cleaning up to 4 test sieves (Ø up to 200/203 mm) in an ultrasonic bath. The inclined position of the test sieves in the SRH 4/200 ensures a better cleaning and rinsing effect. Thus, the test sieves are cleaned gently and without changing the mesh size or fabric tension. The dimensional accuracy and calibration of the test sieves are maintained at 100%.

For	Dimensions (W x D x H) mm	PK	Cat. No.	Price
				EUR
Xtra 300	675 x 295 x 330	1	7.639 092	1,565.00

Safety wash bottles, LDPE



The leakproof venting valve ensures that the excess pressure can escape and dripping is prevented.

- Yellow transparent, with light protection
- Safe filling due to wide-necked opening

Capacity	PK	Cat. No.	Price
ml			EUR
500	1	6.251 918	12.40

Culture flasks, glass DURAN®, straight neck



DURAN®, Erlenmeyer. Straight neck. Suitable for metal caps. Glass Type I/neutral glass as per USP, EP and JP. With retrace code (Batch Identification). Certificate available via the Internet. Autoclavable.

Capacity	Diam.	Neck diam.	Height	PK	Cat. No.	Price
ml	mm	mm	mm			EUR
100	64	38	114	1	9.010 472	22.69
200	79	38	138	1	9.010 473	24.43
250	85	38	149	1	9.010 474	25.11
300	87	38	161	1	9.010 475	12.43
500	105	38	183	1	9.010 476	15.62
1000	131	38	229	1	9.010 477	32.59

LLG-Absorbent, oil and chemical binder, granules



Universal chemical and oil binder for all liquids, as well as for solvents. Very high absorption capacity (up to 1:75 of aqueous solutions). Almost dust-free granules with colour indicator: colour changes to yellow in contact with acids, to red in contact with alkalis. Disposal according to the pollutant recorded. The safety data sheets of these products are available at www.llg-labware.com.

Capacity	PK	Cat. No.	Price
kg			EUR
0.45	1	4.682 249	41.70

LLG Weighting Rings, Cast Iron, Vinyl Coated



To stabilise glassware in water or oil baths. The vinyl coating prevents vessels and apparatus from being scratched or marked.

For flasks	Int. diam.	PK	Cat. No.	Price
ml	mm			EUR
100 ... 500	48	1	4.682 062	36.90
250 ... 1000	56	1	4.682 063	39.60
500 ... 2000	61	1	4.682 064	45.70
1000 ... 4000	74	1	4.682 065	49.30

Scissors, stainless steel



6.280 910



6.280 912



6.280 913



6.280 914

Swiss made, high quality finish, suitable for medical purposes. Length: 90 mm.

Form	PK	Cat. No.	Price
			EUR
Curved body form (miniature work), extra fine, sharp - sharp	1	6.280 910	30.44
Straight body form (miniature work), extra fine, sharp - sharp	1	4.668 556	30.44
Curved body form, extra fine, sharp - sharp	1	6.280 911	30.44
Straight body form, extra fine, sharp - sharp	1	4.668 573	30.44
Curved body form, round, strong, sharp - sharp	1	6.280 912	30.44
Curved body form, extra fine, strong, sharp - sharp	1	6.280 913	30.44
Straight body form, blunt - blunt	1	6.280 914	30.44

Spatula set, 14-pieces



In the zipper case, the spatula is attached with loops.

- 2 Spoon spatula, 150 mm, 180 mm
- 3 Micro-spatula, spoon 5 x 7 mm, 100, 150, 185 mm
- 3 Double spatula, rigid, 130, 150, 185 mm
- Micro-powder spatula, flexible, 150 mm
- Pharmacist spoon, double-ended, 170 mm
- Chemical spoon, double-sided, 150 mm
- Weighing spatula, 170 mm
- 2 Micro-double spatula, spoon-shaped, 130, 150 mm

Type	PK	Cat. No.	Price
			EUR
HSO 132-00	1	6.312 442	94.50

Micro spoon spatulas, 18/10 steel



Excellent grade polished stainless steel with one end having a flat spatula and the other end having a micro spoon.

Length	PK	Cat. No.	Price
mm			EUR
150	1	9.150 820	4.87
180	1	4.008 451	5.10
210	1	6.267 816	5.10

Spatulas with a wooden handle, stainless steel



Flexible, long blade as outlined below.

Blade width	Blade length	Length	PK	Cat. No.	Price
mm	mm	mm			EUR
18	100	190	1	9.220 610	6.00
20	130	230	1	9.220 613	6.13
22	150	250	1	9.220 615	6.27
32	200	310	1	9.220 620	8.56
42	300	415	1	9.220 630	9.73

LLG-Timer



Top Sellers!



LLG-Timer pro



LLG-Dual-Timer

The LLG-Timer can be used simultaneously as real-time clock and timer.

The countdown timer also runs when time is visible.

- Big 6-digit LCD
- Digital stopwatch (counting up)
- Short timer (counting down)
- With memory function
- Stopwatch and countdown up to 23 h 59 min. 59 sec.
- Optical and acoustic alarm when a timer expires
- Incl. magnet for mounting, hanging bracket and stand (fold-out)

Specifications

LLG-Timer pro ||
LLG-Dual-Timer, 2-channel ||
LLG-Timer Triple pro
 Dimensions (W x H x D): 82 x 68 x 20.5 mm || 97 x 79 x 21 mm || 68 x 88.7 x 16.2 mm
 Weight (with battery): 82 g || 95 g || 87 g
 Power supply: 2 x AAA 1.5 V (not included)
 Warranty: 12 months

Dimensions (W x H x D):

Weight (with battery):

Power supply:

Warranty:



LLG-Timer Triple pro

Type	PK	Cat. No.	Price
			EUR
LLG-timer pro	1	6.311 351	18.48
LLG-Dual-Timer	1	6.311 350	17.60
LLG-Timer Triple pro	1	6.313 417	23.36

Interval timer with alarm



Benchtop mechanical timer. Suitable for standing, hanging and in addition on the back of two magnets, which allows the fitting of metal parts. The casing and rotary setting knob are white, the dial is black. Running time max. 60mins. Metal movement.

Dimensions (W x H x D): 70 x 70 x 40 mm

Type	PK	Cat. No.	Price
			EUR
Interval timer with alarm	1	9.260 020	12.40

LLG-Short period timer with alarm



Easy-to-use combination timer and stopwatch, with large display and alarm function from/up to 99 min. and 59 sec. With a magnet for easy fixing. Battery LR 44 inclusive.

Dimensions (Ø x H): 54 x 16.5 mm
 Weight: approx. 40 g

Type	PK	Cat. No.	Price
			EUR
LLG-Short period timer with alarm	1	9.260 150	10.60




Overhead stirrer RW 20 digital



- Robust, ergonomic design with digital display
 - With constant power drive
 - Two speed ranges for universal use from 60 to 2000 rpm
-
- Technical improvements on the trusted RW20 series design, mechanically controlled
 - With digital display
 - Robust, ergonomic design
 - Constant power-drive
 - Two speed ranges for universal use from 60 to 2000 rpm
 - Hollow-shafted chuck for rotor shaft height adjustment (only when stationary)



Magnetic stirrers/hotplates, multi-position, RT 5/10/15

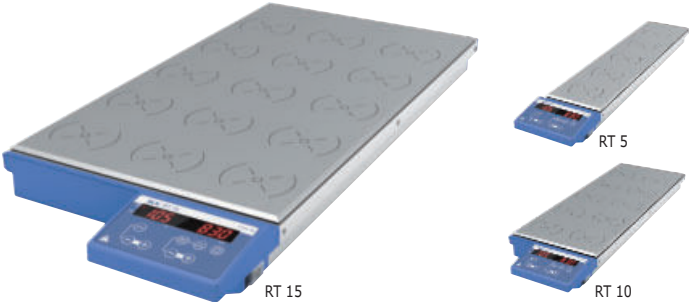

Digital magnetic hotplate stirrers with 5, 10 or 15 positions, designed for synchronous heating and stirring. The magnetic coil technology provides noiseless and consistent stirring in all positions.

- Homogeneous temperature distribution across the heating plate
- Adjustable reverse operation
- Suitable for continuous operation

Specifications

Max. stirring quantity per stirring position (H ₂ O):	0.4 l
Distance between stirring places:	90 mm
Speed range:	0 to 1000 rpm
Heating rate (1l H ₂ O in H15):	3 K/min
Temperature range heating plate:	RT to 120 °C
Max. temperature medium (dep. on vessel):	70 °C
Temperature display:	LED
Heat control accuracy:	±1 K
Speed display:	LED line
Set-up plate material:	aluminium alloy
Protection class acc. to DIN EN 60529:	IP 40
Power supply:	100-240 V, 50/60 Hz

Specifications

Stirring volume max. (H ₂ O):	20L
Viscosity range:	up to 10000 mPas
Motor rating input/output:	70/35 W
Output max. at stirring shaft:	26 W
Max. stirring shaft torque (at 100 rpm.):	150 Ncm
Speed range I (at 50 Hz):	60 to 500 rpm.
Speed range II (at 50 Hz):	240 to 2000 rpm.
Chuck range:	0.5 to 10 mm
Diameter/length of extension arm:	13 mm/160 mm
Dimensions (W x D x H)	88 x 212 x 294 mm
Weight:	3.1 kg
Protection class acc. to DIN EN 60529:	IP 20
Supply requirements:	230 V 50/60 Hz
Tested to DIN EN IEC 61010-1.	


Type	Stirring positions	Dimensions (W x D x H)	Plug type	PK	Cat. No.	Price
		mm				EUR
RT 5	5	120 x 610 x 60	EU	1	9.720 603	2,455.30
RT 5	5	120 x 610 x 60	UK	1	9.720 604	2,460.95
RT 5	5	120 x 610 x 60	CH	1	9.720 605	2,460.31
RT 10	10	190 x 610 x 60	EU	1	9.720 606	3,241.34
RT 10	10	190 x 610 x 60	UK	1	9.720 607	3,246.99
RT 10	10	190 x 610 x 60	CH	1	9.720 608	3,246.35
RT 15	15	280 x 610 x 60	EU	1	9.720 609	4,076.40
RT 15	15	280 x 610 x 60	UK	1	9.720 610	4,082.05
RT 15	15	280 x 610 x 60	CH	1	9.720 611	4,081.41

Diagonal blade stirring rotors, 4-blade, stainless steel 1.4404



The 4-blade diagonal blade agitator ensures an axial flow pattern and increasing shear forces are generated on the agitator blades at higher speeds.

Dissolver stirring rotors, stainless steel 1.4404



The dissolver stirring rotor creates a radial flow with high turbulence.

Ø agitator mm	Ø agitator shaft mm	Length mm	PK	Cat. No.	Price EUR
50	8	350	1	9.197 006	182.00
100	8	540	1	9.197 009	224.00

Ø agitator mm	Ø agitator shaft mm	Length mm	PK	Cat. No.	Price EUR
40	8	350	1	9.197 007	504.00
80	8	350	1	9.197 001	324.00

Magnetic mini-stirrers topolino



Without heating. Extremely convenient magnetic mini-stirrer for mixing volumes up to 250 ml.

- Durable, brushless motor
- Infinitely variable speed range
- Strong magnetic coupling



Specifications

Stirring quantity max. (H ₂ O):	250 ml
Speed range:	300 ... 1800 rpm
Permissible ambient temperature:	5 ... 40 °C
Permissible relative humidity:	80%
Material:	PP
Dimensions Top plate (Ø):	80 mm
Dimensions (W x H x D):	95 x 37 x 115 mm
Weight:	0.32 kg
Power supply:	100 ... 240 V, 50/60 Hz
IP code:	IP 21

Type	Plug type	PK	Cat. No.	Price
Topolino	EU/CH	1	9.720 220	EUR 113.76

LLG-Magnetic stirring bars, cylindrical, PTFE, *eco pack*



Circular, smooth and PTFE-coated.
Packaging size: 10 pieces

Diam.	Length	PK	Cat. No.	Price
mm	mm			EUR
6	10	10	9.198 910	13.28
6	12	10	9.198 766	13.44
6	15	10	9.198 919	14.16
6	20	10	9.198 920	16.64
6	25	10	9.198 925	17.52
8	25	10	9.198 767	18.08
6	30	10	9.198 930	19.92
6	35	10	9.198 935	21.52
8	40	10	9.198 940	22.96
8	45	10	9.198 945	24.32
8	50	10	9.198 950	27.12
9	60	10	9.198 960	29.60
9	70	10	9.198 970	36.00
9	80	10	9.198 980	40.80

LLG-Magnetic Stirring Bar Retrievers, PTFE



PTFE-encapsulated stirring bar retriever with strong permanent magnet (Alnico 5), universal chemical resistance. The removal of stirring bars from aggressive liquids prevents the loss of stirring bars. Lower end diameter 10 mm.

Diam.	Length	PK	Cat. No.	Price
mm	mm			EUR
8	150	1	9.197 717	15.50
8	250	1	9.197 725	19.10
8	270	1	4.008 501	22.10
8	350	1	9.197 735	21.90

Magnetic stirrers Guardian™ 5000



- High safety standard
- Temperature and speed change control
- Monitoring of the maximum temperature



e-G52HS07C-K1

e-G52HSRDA-K1

These magnetic stirrers are designed for safety and versatility across research, academic and industrial settings. They offer powerful mixing with premium hardware and software to support users safely and reliably.

- SmartRate™ enables to selection of fast or slow temperature and speed ramp rates
- SmartHeat™ safely controls and monitors the maximum temperature
- SafetyHeat™ assures safety in heating applications with dual monitoring of system health
- With connection for temperature sensor (Pt 100, Pt 1000)
- Run dry protection with an alarm
- Timer from 1 min to 99 h 59 min
- With RS232 interface
- Speed range: 50 ... 1800 rpm

Scope of supply: Hotplate stirrer, temperature sensor Pt 1000, sensor holder kit

Type	Stirring capacity	Dimensions (W x D x H)	PK	Cat. No.	Price
	l	mm			EUR
e-G52HS07C-K1*	20	221 x 329 x 116	1	4.702 915	880.00
e-G52HS10C-K1*	22	287 x 402 x 118	1	4.702 916	1,145.00
e-G52HSRDA-K1**	20	175 x 259 x 108	1	4.702 917	815.00

* square cover plate, **round cover plate

Retort stand bases



To DIN 12892. Steel, powder-coated, 8 mm thick. Rubber feet. With an M10 bore a hole in the middle of one shorter side.

Width	Depth	PK	Cat. No.	Price
mm	mm			EUR
100	180	1	7.200 420	16.89
130	210	1	9.224 013	19.72
160	250	1	6.076 836	24.46
150	300	1	9.224 015	32.91
200	315	1	9.224 017	40.27

Support rods galvaniser steel



Galvanised steel. External diameter 12 mm. With M10 thread.

Length	PK	Cat. No.	Price
mm			EUR
500	1	9.224 105	13.44
600	1	9.224 106	14.43
750	1	9.224 107	16.12
1000	1	9.224 110	18.32
1250	1	7.095 411	20.66
1500	1	9.224 115	23.47

Support rings, galvanised steel



Closed ring, with bosshead.

Int. diam.	Length	PK	Cat. No.	Price
mm	mm			EUR
50	70	1	4.659 172	23.24
70	70	1	9.225 081	25.45
100	70	1	6.238 844	27.02
130	70	1	7.651 881	29.97

Bosshead



9.224 251



9.224 257

To DIN 12895. Zinc die casting, powder-coated. For vertical and horizontal clamping.

Description	Jaw opening mm	PK	Cat. No.	Price
				EUR
Bosshead with steel screws	16	1	9.224 251	7.99
Bosshead with brass screws	16	1	9.224 245	8.39
Double cross boss head with brass screws	20	1	9.224 257	11.74

Clamps



To DIN 12894. B form. Zinc die casting, powder-coated. With round jaws.

Clamping range	PK	Cat. No.	Price
mm			EUR
25	1	9.224 302	9.17
40	1	9.224 304	9.84
60	1	9.224 306	10.76
80	1	9.224 319	15.55

LLG-Splash heads, straight, borosilicate glass 3.3



Straight, with standard ground cone and socket.

Cone	Socket	PK	Cat. No.	Price
NS	NS			EUR
14/23	14/23	2	4.686 184	47.20
29/32	29/32	1	4.686 185	29.20

Evaporating flasks with conical ground joint, DURAN®



Especially for rotary evaporators, with a centre neck and conical joint, pear-shaped.

Nominal capacity ml	Socket	Flask diam. mm	PK	Cat. No.	Price
	NS				EUR
50	29/32	56	1	9.196 020	20.23
100	29/32	60	1	9.196 024	24.62
250	29/32	81	1	9.196 036	42.78
500	29/32	101	1	9.196 044	49.29
1000	29/32	126	1	9.196 054	70.99
2000	29/32	158	1	9.196 063	93.42

Rubber Balloon with Hose Connection



- Latex (NR)
- For Rotary Evaporators
- Suitable for mixture or collection and short-term storage of gases
- For control of air/gas entry or tread out of gas in instruments

Size	Volume	PK	Cat. No.	Price
	litres			EUR
5	approx. 1.5 ... 2	1	9.115 515	57.12
8	approx. 3.5 ... 4	1	7.652 667	83.00

Rotary Evaporator Hei-VAP Core



- Clear display
- Residual heat warning
- Ergonomic handles



An operating concept reduced to the essentials: clear and with direct access to the basic parameters of rotation speed and heating bath temperature at all times. Without vacuum control. For integration into an existing vacuum system or for configuration with an optional vacuum controller.

- Handlift model
- Clear digital display for monitoring the current values and a separate button to display the set values
- Two separate operating knobs for adjusting the rotation speed and heating temperature with an LED ring light system for activity indication
- Activated lock feature prevents inadvertent adjustments
- Residual heat indicator when >50 °C
- Standby button stops all functions and lifts the evaporator flask out of the heating bath on motor lift models

Scope of supply: Flask clamp Easy-Clip, vapour tube, ventilation cap, heating bath, 1-l receiving flask, 1-l evaporating flask. Supplied condenser as indicated.

Specifications Drive

Speed range: 10 ... 280 rpm
Speed display: Digital
Stroke displacement: 155 mm
Protection class: IP 20

Heating bath

Bath volume: 4.5 L
Temperature range: Ambient ... 210 °C
Power input: 1300 W
Protection class: IP 67

General data

Max. size evaporating flask: 5 L
Condensing surface: 1400 cm²
Condensing surface XL condenser: 2200 cm²
Power supply: 230 V

Description	PK	Cat. No.	Price
			EUR
G3 Vertical condenser	1	4.666 086	3,896.90

Mini centrifuge LLG-uniCFUGE 3 pro



This compact Mini centrifuge offers versatility, simplicity, safety and ease of usage in just one package and is especially suitable for microfiltration, cell separations and spin-down applications.

- Easy rotor change via magnetic fixing
- Microprocessor-controlled regulation for load-independent accuracy and integrated imbalance control
- Digital display
- Integrated timer
- Starts and stops in seconds
- Lid safety interlock
- Smooth and silent, discreet running

The following types of vessels can be used:

8 x 1.5 ml microtubes
8 x 2 ml microtubes
16 x 0.2 ml PCR tubes

By using the fitting adapter:

8 x 0.2 ml microtubes
8 x 0.5 ml microtubes

Scope of supply: Centrifuge, rotor for 8 x 1.5/2 ml tubes, rotor for 16 x 0.2 ml PCR tubes, adapter for 8 x 0.2/0.5 ml tubes, power adapter (24 V, 1.5 A)

Specifications

Max. RCF:	2000 x g
Max. speed:	1000 ... 6000 rpm
Motor:	brushless DC motor
Max. load:	8 x 1.5/2 ml or 16 x 0.2 ml PCR tubes
Timer:	1 ... 25 min, continuous
Dimensions (W x D x H):	162 x 157 x 116 mm
Weight:	1.1 kg
Power supply:	100 ... 240 VAC, 50/60 Hz

Description	Plug type	PK	Cat. No.	Price
LLG-uniCFUGE 3 pro	EU	1	6.263 522	297.40
LLG-uniCFUGE 3 pro	UK	1	6.263 527	305.70

LLG-Microcentrifuge tubes, PP, with Safe-Lock lid

With a tight-fitting Safe-Lock lid, which prevents unintentional opening of the lid during centrifugation.

- Frosted labelling area on the lid
- RNase- and DNase-free



Volume	Form	Temp. range	PK	Cat. No.	Price
ml		°C			EUR
1.5	Conical	-86 ... 121	1000	6.490 852	22.70
2.0	Round	-86 ... 121	1000	6.490 853	25.80

Mikrocentrifuge Frontier™



- With unbalance sensor
- Powerful, brushless induction motor
- 10 acceleration and deceleration rates



FC5513-K

Compact high-speed microcentrifuge with modern touch-wheel interface. Ideal suited for general laboratory applications.

- Backlit, two-lined LCD
- Powerful brushless induction motor
- 10 acceleration and deceleration rates
- Memory for up to 99 parameters
- Imbalance sensor
- Small footprint

Scope of supply: Centrifuge, angle rotor for 24 x 1.5/2.0 ml tubes or with angle rotor for 18 x 1.5/2.0 ml tubes

Specifications

Max. RCF:	17317 x g 15994 x g 17317 x g
Max. Speed:	20 ... 13500 200 ... 14000 200 ... 13.500 rpm
Max. Load:	24 x 1.5/2.0 ml 18 x 1.5/2.0 ml 24 x 1.5/2.0 ml
Timer:	10 s ... 99 h 59 min 59 s, continuous
Power consumption:	170 W
Dimensions (W x D x H):	277 x 356 x 236 mm
Weight:	13.1 kg
Power supply:	230 V, 50/60 Hz

FC5513-K || FC5513-L || FC5513R

Type	PK	Cat. No.	Price
			EUR
FC5513-K	1	6.323 158	1,705.00
FC5513-L	1	4.699 640	1,510.00
FC5513R	1	4.699 641	3,995.00

Fixed angle rotors for micro centrifuges Frontier™ FC5513

Type	For tubes	Lid	PK	Cat. No.	Price
	ml				EUR
R-A24X2/13MB	24 x 1.5/2.0 ml	Aerosol-tight	1	6.324 563	332.00

Vortex mixers ZX4/WIZARD/TX4 with IR sensor



- IR sensor for sample detection
- Very good chemical resistance



Vortexers with patented IR sensor for sample recognition: the shaking process starts automatically when the sample tube approaches the mixing cup head. This enables fatigue-free working, as the sample doesn't have to be pressed on the device.

- For IR sensor and continuous operation
- Electronic speed control
- Adjustable shaking speeds up to 3000 rpm
- Very good chemical resistance

ZX4: Analog vortex mixer

WIZARD: Compact, analogue vortex mixer

TX4: Digital vortex mixer with timer and LCD

Scope of delivery: Vortex mixer with mixing head

Specifications

Type of movement:	orbital
Orbital diameter:	4.5 mm
Speed range:	0 ... 3000 rpm
Input power	15 W
IP code:	IP 42
Power supply:	100 ... 240 V, 50 ... 60 Hz
Warranty:	3 years

Type	PK	Cat. No.	Price
			EUR
ZX4	1	7.971 461	210.00
ZX4 with foam stands	1	4.666 714	256.00
WIZARD	1	4.666 536	245.00
TX4	1	4.666 537	299.00

LLG-Centrifuge tubes, PP



Conical Polypropylene tubes with very good thermal, mechanical and chemical stability.



Centrifugation capacity (Max. RCF): 6000 x g
Height: 120 mm

Description	Capacity	Diam.	PK	Cat. No.	Price
	ml	mm			EUR
sterile, single packed*	15	17	50	9.316 062	18.90
aseptic, bulk pack	15	17	50	6.263 886	16.20
big pack	15	17	500	9.316 063	120.40
sterile, single packed*	50	30	50	9.316 064	26.30
big pack	50	30	500	9.316 065	148.90
aseptic, bulk pack	50	30	50	6.263 887	17.20

*Cytotoxicity-free, DNase/RNase- and human DNA-free.

Test tube shaker LLG-uniTEXER 1 pro

Ideal for mixing small sample volumes in vessels up to 30 mm in diameter.

- Touch function for short-time operation
- Adjustable speed control for excellent mixing results
- Suction cups ensure a secure hold during vortexing
- Extremely small footprint

Scope of supply: Test tube shaker, universal power supply including adapter for EU and UK



Type of movement:	orbital
Shaking stroke:	4.5 mm
Speed:	0 ... 4200 rpm
Dimensions (WxDxH):	120 x 120 x 103 mm
Permitted ambient conditions:	4 ... 45 °C, 80% RH
Rated capacity:	9 W
Power supply:	100 ... 240 V, 50/60 Hz
IP code:	IP 43

Type	PK	Cat. No.	Price
			EUR
LLG-uniTEXER 1 pro	1	6.263 509	210.80

Microtitre shaker LLG-uniPLATESHAKER 1



The device can be operated in a cold room. Universal fit comes with interchangeable clamps for different microplate sizes.

Scope of supply: shaker, mains adapter, 2 attachments (foam attachment and attachment for microtitre plates), 6 clamps

Specifications

Type of movement:	orbital
Orbital diameter:	2 mm
Speed range:	300 ... 1800 rpm
Max. load:	1 kg
Motor:	brushless DC motor
Timer:	1 ... 99 min, continuous
Power consumption:	15 W
Permissible ambient temperature:	4 ... 40 °C
Dimensions (W x D x H):	127 x 85 x 86 mm
Weight:	1.4 kg
Power supply:	100 ... 230 V, 50/60 Hz

Type	Plug type	PK	Cat. No.	Price
				EUR
LLG-uniPLATESHAKER 1	EU	1	6.263 488	266.70
LLG-uniPLATESHAKER 1	UK	1	6.263 489	266.70

Analytical balances Entris® II

SARTORIUS



- Quality "Made in Germany"
- With isoCAL
- High chemical resistance



With many convenience functions for efficiency and accuracy in the laboratory. Quality "Made in Germany".

- Modern sensors ensure very fast stabilisation time
- Automatic, internal calibration and adjustment function (isoCAL) for all "i" models
- Weighing platform is made of stainless steel
- Excellent readability and operability with a hybrid touch display
- Automatic detection of connected Sartorius accessories

High weighing space, easy access to weighing platform through side doors and upper sliding door. Specially coated windscreen against an electrostatic charge. All models are also available as approved versions for EU/France.

Scope of supply: Analytical balance, power supply unit, display protection cover

Specifications

Readability:	0.1 mg
Reproducibility:	±0.1 mg
Linearity:	±0.06 mg
Weighing platform:	Ø 90 mm
Weighing space height:	240 mm
Dimensions (W x D x H):	219 x 317 x 345 mm
Weight:	6.2 kg
Power supply:	100 ... 240 V, 50 ... 60 Hz

Type	Weighing range	PK	Cat. No.	Price
	g			EUR
BCE64-1S	0.0001 ... 60	1	4.669 165	1,621.20
BCE64i-1S	0.0001 ... 60	1	4.669 168	1,797.60
BCE124-1S	0.0001 ... 120	1	4.669 109	1,722.00
BCE124i-1S	0.0001 ... 120	1	4.669 112	1,898.40
BCE224-1S	0.0001 ... 220	1	4.669 125	1,839.60
BCE224i-1S	0.0001 ... 220	1	4.669 128	1,990.80

Portable Balances, Scout® SKX



SKX421



SKX8200

- Superior overload protection and practical stackable design for convenient storage
- Bright backlit LCD and 4-button operation make the new Scout easy to see and use
- Multiple connectivity options are available for data logging and communication
- Fast weighing speed and high resolution deliver repeatable and reliable results
- Construction: ABS housing, stainless steel pan, replaceable in-use cover

Type	Capacity	Plate dimensions	PK	Cat. No.	Price
	g	mm			EUR
SKX123	120	diam. 93	1	6.281 344	550.00
SKX222	220	diam.120	1	6.281 345	396.00
SKX422	420	diam. 120	1	6.281 346	473.00
SKX622	620	diam. 120	1	6.281 347	520.00
SKX1202	1200	170 x 140	1	6.281 348	610.00
SKX2202	2200	170 x 140	1	6.281 349	655.00
SKX421	420	diam. 120	1	6.281 350	233.00
SKX621	620	170 x 140	1	6.281 351	263.00
SKX2201	2200	170 x 140	1	6.281 352	389.00
SKX6201	6200	170 x 140	1	6.281 353	530.00
SKX8200	8200	170 x 140	1	6.281 354	319.00

LLG-Weighing bottles with NS lid, Borosilicate glass 3.3



With writing area.
Available in tall or low shape.

Capacity	Form	Diam.	Height	NS	PK	Cat. No.	Price
ml		mm	mm				EUR
3	Low	25	25	19/12	1	9.300 151	12.90
10	Low	35	30	29/12	1	9.300 152	13.30
11	Low	40	25	34.5/12	1	9.300 150	14.00
20	Low	50	30	45/12	1	9.300 153	14.90
29	Low	60	30	50/12	1	9.300 154	18.10
9	Tall	25	40	19/12	1	9.300 160	13.80
19	Tall	30	50	24/12	1	9.300 161	14.40
42	Tall	35	70	29/12	1	9.300 162	14.80
66	Tall	40	80	34.5/12	1	9.300 163	15.20
105	Tall	50	80	45/12	1	9.300 164	14.90

pH meter FiveGo™ F2



F2-Standard kit

Portable pH meter for field work and laboratories. Measurement made easy: A large, well-structured display, intuitive button arrangement and simple menu ensure measurements can be performed in just a few clicks.

Scope of delivery:

F2-Meter: Meter only

F2-Standard kit: Meter with LE438 sensor

F2-Food kit: Meter with LE427 sensor, carrying case

Specifications

pH

Measuring range: 0.00 ... 14.00

Resolution: 0.01

Accuracy: ±0.01

mV

Measuring range: -1999... 1999 mV

Resolution: 1 mV

Accuracy: ±1 mV

Temperature

Compensation: ATC and MTC

Calibration: 3 points, 4 predefined buffer groups

Memory size: 200 measurements, current calibration

Temperature

Measuring range: 0 ... 100 °C

Resolution: 0.1 °C

Accuracy: ±0.5 °C

Dimensions (W x D x H): 188 x 77 x 33 mm

IP code: IP 67 (meter + electrode)

Type	PK	Cat. No.	Price
F2-Meter	1	6.280 111	365.00
F2-Standard kit	1	6.280 112	545.00
F2-Field kit	1	6.280 113	615.00

Technical pH buffer solutions



Colour coded. Tested and certified according to ISO 17025 at 25 °C. Tolerance ±0.02 pH. Information on temperature dependence, batch numbers and expiry date are printed on the label. All buffers are supplied with a detailed certificate of analysis which includes traceability to N.I.S.T. (N.I.S.T. SRM(s) lot number is stated on the certificate).

Capacity	pH-value	Colour	PK	Cat. No.	Price
ml	at 25 °C				EUR
500	2.00	Red	1	4.011 273	28.63
500	4.01	Red	1	6.206 907	28.63
500	4.60	Yellow	1	6.227 021	28.63
500	7.00	Yellow	1	6.229 762	28.63
500	9.21	Blue	1	6.205 893	28.63
500	10.00	Blue	1	6.229 763	28.63

Conductivity meter FiveGo™ F3



F3-Standard kit

Portable conductivity meter for fieldwork. Measurement made easy: A large, well-structured display, intuitive button arrangement and simple menu ensure measurements can be performed in just a few clicks.

Supplied with:

F3-Standard kit: Meter with LE703 sensor

F3-Field kit: Meter with LE703 sensor, carrying case

Specifications

Conductivity

Measuring range: 0.00 µS/cm ... 200 mS/cm

Resolution: Automatic range

Accuracy: ±0.5% of the measured value

Temperature

Measuring range: 0 ... 100 °C

Resolution: 0.1 °C

Accuracy: ±0.5 °C

TDS

(Total Dissolved Solids)

Measuring range: 0.01 mg/l ... 200 g/l

Resolution: Automatic range

Temperature compensation: Linear 0.00 ... 10.00%/°C, reference temperature 20 and 25 °C

Calibration: 1 point, 3 predefined standards

Memory size: 200 measurements, current calibration

Dimensions (W x D x H): 188 x 77 x 33 mm

IP code: IP 67 (meter + sensor)

Type	PK	Cat. No.	Price
F3-Standard kit	1	6.280 116	585.00
F3-Field kit	1	6.280 117	635.00

Technical pH buffer solutions, certified reference material (CRM)



Certified reference material



Certified reference material according to ISO 17034. The pH buffer solutions are colour-coded and the uncertainty of measurement of ±0.02 pH was tested at 25 °C. Supplied with detailed certification report which includes traceability to NIST. Lot numbers and expiry dates are printed on the label.

Capacity	pH-value	Colour	PK	Cat. No.	Price
ml	at 25 °C				EUR
500	4.01	red	1	4.695 429	40.09
500	4.60	red	1	4.695 430	40.09
500	7.00	yellow	1	4.695 431	40.09
500	9.21	blue	1	4.695 432	40.09
500	10.00	blue	1	4.695 428	40.09

Laboratory instrument inoLab® pH 7110



- Fast and reliable pH/mV measurement values
- With AutoRead function
- Large LCD display



Basic pH/mV laboratory instrument for all tasks where reliable, accurate readings are required quickly and easily. With a large LCD segment display and an easy-to-read keyboard. The AutoRead function ensures correct and repeatable measurement results. A built-in timer reminds the user of periodical calibration.

Scope of supply: Instrument, mains power adapter, stand

Specifications

Ranges:	All values ± 1 digit
pH:	-2.0 ... 20.0 ± 0.1 pH -2.00 ... 20.00 ± 0.01 pH -2.000 ... 19.999 ± 0.005 pH
mV:	$\pm(1200.0 \pm 0.3)$ mV $\pm(2000 \pm 1)$ mV
Calibration:	1-, 2- or 3 point WTW technical buffer or DIN/NIST
Temperature:	-5.0 ... 105.0 $^{\circ}\text{C} \pm 0.1$ $^{\circ}\text{C}$
Power supply:	Universal power supply 100 to 240 V, 50/60 Hz, 4 x 1.5 V AA or 4 x 1.2 V NiMH rechargeable batteries

Type	Description	PK	Cat. No.	Price
				EUR
pH 7110	Stand-alone instrument with DIN connection	1	9.920 090	688.86
pH 7110 BNC	Stand-alone instrument with BNC connection	1	9.920 093	689.72
pH 7110 SET 2	Instrument incl. SenTix® 41, buffer 4.7 / 10.01 and 3 mol/l KCl	1	9.920 091	890.96
pH 7110 SET 4	Instrument incl. SenTix® 81, buffer 4.7 / 10.01 and 3 mol/l KCl	1	9.920 092	916.76

Reagecon

A CALIBRE SCIENTIFIC COMPANY

Lab Unlimited

CARL STUART GROUP

A CALIBRE SCIENTIFIC COMPANY



Reagecon Diagnostics Ltd.
Shannon Free Zone, Shannon,
Co. Clare, Ireland

Phone: +353 61 472622
Email: sales@reagecon.ie
Web: www.reagecon.com

Lab Unlimited | Carl Stuart Ltd.
Tallaght Business Park, Whitestown,
Dublin 24, D24 RFK3, Ireland

Phone: +353 1 4523432
Email: sales@labunlimited.com
Web: www.labunlimited.com

Labortops

PARTNER OF
LLG
Laboratory Supply Solutions